

Number of h -cycles in the Internet at the Autonomous System Level

Ginestra Bianconi¹, Guido Caldarelli^{2,3} and Andrea Capocci^{3,4}

¹*The Abdus Salam International Center for Theoretical Physics, Strada Costiera 14, 34014 Trieste, Italy*

²*INFN UdR Roma1 and Dipartimento di Fisica Università "La Sapienza", P.le A. Moro 2, 00185 Roma, Italy*

³*Centro Studi e Ricerche E. Fermi, Compendio Viminale, Roma, Italy*

⁴*Section de Physique, Université de Fribourg, Pérolles 1700 Fribourg, Switzerland*

We present here a study of the clustering and cycles present in the graph of Internet at the Autonomous Systems level. Even if the whole structure is changing with time, we present some evidence that the statistical distributions of cycles of order 3,4,5 remain stable during the evolution. This could suggest that cycles are among the characteristic motifs of the Internet. Furthermore, we compare data with the results obtained for growing network models aimed to reproduce the Internet evolution. Namely the fitness model, the Generalized Network Growth model and the Bosonic Network model. We are able to find some qualitative agreement with the experimental situation even if the actual number of cycles seems to be larger in the data than in any proposed growing network model. The task to capture this feature of the Internet represent one of the challenges in the future Internet modeling.

PACS numbers: : 89.75.Hc, 89.75.Da, 89.75.Fb

Internet is a beautiful example of a complex system with many degrees of freedom resulting in global scaling properties. It has been shown [1, 2] that the Internet belongs to the wide class of scale-free networks [3, 4, 5, 6]. Indeed, it can be described as a network, with nodes and links representing respectively Autonomous Systems (AS) and physical lines connecting them; moreover, its degree distribution follows a power-law behavior.

Different topological quantities have also been measured beside the degree distribution exponent. Among those, the clustering coefficient $C(k)$ and the average nearest neighbor degree $k_{nn}(k)$ of a node as a function of its degree k [7, 8, 9]. In particular, measurements in Internet yield $C(k) \sim k^{-0.75}$ [10] and $k_{nn} \sim k^{-\nu}$ with $\nu \simeq 0.5$ [10]. A two-vertices degree anti-correlation has also been measured [12]. Accordingly, Internet is said to display disassortative mixing [11], because nodes prefer to be linked to peers with different rather than similar degree. Moreover, the modularity of the Internet due to the national patterns has been studied by measuring the slow decaying modes of a diffusion process defined on it [13].

Recently, more attention has been devoted to network motifs [14, 15], i.e. subgraphs that recur with a higher frequency than in maximally random graphs with the same degree distribution. Among those, the most natural class includes cycles[16, 17], closed paths of various lengths that visit each node only once. Cycles (or loops) are interesting because they account for the multiplicity of paths between any two nodes. Therefore, they encode the redundant information in the network structure. Following the arguments of [14], it can be shown that the number N_h of cycle of size h , in a equilibrium undirected scale-free network of N nodes with a power-law degree distribution $P(k) \sim k^{-\gamma}$, is

$$N_h(N) \sim N^{\xi(h)} \quad (1)$$

with

$$\xi(h) = \begin{cases} 1 & \text{for } \gamma \leq 2 \\ 3 - \gamma & \text{for } 2 < \gamma \leq 3. \\ 0 & \text{for } \gamma \geq 3 \end{cases} \quad (2)$$

In other words, $N_h(N)$ is an algebraic function of the system size with an exponent ξ independent of the length h of the cycle.

In contrast, the only analytical result [16] for off-equilibrium, scale-free networks refers to the Barabási-Albert model [18], and reads

$$N_h(N) \sim \left(\frac{m}{2} \log(N) \right)^{\psi(h)}, \quad (3)$$

with $\psi(h) = h$.

To measure the actual scaling in Internet at the AS level, we considered its symmetrical adjacency matrix $\{a_{ij}\}$, with $a_{ij} = 1$ if i and j are connected and $a_{ij} = 0$ otherwise. We assume that no self-loop is present, i.e. $a_{ii} = 0$ for all i . In this case, for $h = 3$ we simply have [16]

$$N_3 = \frac{1}{6} \sum_i (a^3)_{ii}. \quad (4)$$

For $h = 4$ and $h = 5$, by simple arguments it is possible to show that

$$N_4 = \frac{1}{8} \left[\sum_i (a^4)_{ii} - 2 \sum_i (a^2)_{ii} (a^2)_{ii} + \sum_i (a^2)_{ii} \right] \quad (5)$$

and that

$$N_5 = \frac{1}{10} \left[\sum_i (a^5)_{ii} - 5 \sum_i (a^2)_{ii} (a^3)_{ii} + 5 \sum_i (a^3)_{ii} \right]. \quad (6)$$

The data of the Internet at the Autonomous System level are collected by the University of Oregon Route

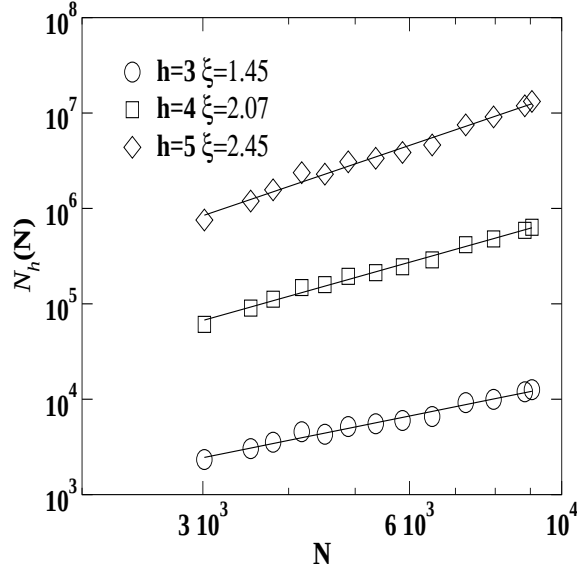


FIG. 1: Number of h -loops N_h as a function of the system size N for loops of length 3,4,5.

Views Project and made available by the NLNR (National Laboratory of Applied Network Research). The subset we used in this manuscript are mirrored at COSIN web page <http://www.cosin.org>. We considered 13 snapshots of the Internet network at the AS level at different times starting from November 1997 (when $N = 3015$) toward January 2001 ($N = 9048$). Throughout this period, the degree distribution is a power-law with a nearly constant exponent $\gamma \simeq 2.22(1)$. Using relations (4), (5), (6), we measure $N_h(t)$ for $h = 3, 4, 5$ in the Internet at different times, corresponding to different network size. We observe in figure 1 that the data follow a scaling of the type (1), as predicted by [14] for maximally random (equilibrium) scale-free networks. Unfortunately, the exponents $\xi(h)$ strongly depend on h , as reports table I, and significantly exceed the predicted value (Eq.(2)) for equilibrium scale-free networks with same γ , that is, $\xi = 0.78$.

So, we can state that loops up to size 5 are much more frequent in Internet than in a random scale-free networks with a similar degree distribution. $\xi(h)$ and N_h are large even when compared with off-equilibrium networks inspired by the Internet growth. The models we consider here reproduce the most accurately the Internet behavior as regards the degree, clustering and centrality probability distributions.

The fitness model [19], for example, is a growing network model where, at each time step, a new node is added to the network and connected by m links to existing ones. Each node has a fitness η_i , randomly drawn from a uniform distribution in $[0, 1]$, which enters into the probability that a node acquires a new link,

$$\Pi_i = \frac{\eta_i k_i(t)}{\sum_j \eta_j k_j(t)}. \quad (7)$$

The fitness represents an intrinsic ability of a node in the

acquisition of new links. The resulting network is a scale-free one with $\gamma = 2.255$. It has also been found [7, 8] that $C(k)$ and $k_{nn}(k)$ are in qualitative agreement with Internet data.

As a second instance, we compare the Internet data to the recently proposed Generalized Network Growth Model (GNG) [22]. According to its definition, at each time step

1. either a node is added and linked with vertex i with probability

$$p \frac{k_i}{\sum_{j=1,N} k_j}. \quad (8)$$

2. or a link is added (if absent) between nodes i and j already present. with probability

$$(1-p) \frac{k_i}{\sum_{k=1,N} k_k} \frac{|k_i - k_j|}{\sum_{k \neq i=1,N} |k_i - k_k|}. \quad (9)$$

The resulting network is a scale-free one, with $\gamma(p) = 2 + \frac{p}{2-p}$. Besides, it displays the non trivial features of the degree correlations as measured in Internet.

Finally, we considered the Bosonic Network (BN), where each node i is assigned an innate quality in the spirit of Ref.[20], represented by a random 'energy' ϵ_i drawn from the probability distribution $p(\epsilon_i)$. The attractiveness of each node i is then determined jointly by its connectivity k_i and its energy ϵ_i . Namely, the probability that node i acquires a link at time t is given by

$$\Pi_i = \frac{e^{-\beta \epsilon_i} k_i(t)}{\sum_j e^{-\beta \epsilon_j} k_j(t)}, \quad (10)$$

i.e. low energy, high degree nodes are more likely to acquire new links. The parameter $\beta = 1/T$ in Π_i tunes the relevance of the quality with respect to the degree in the acquisition probability of new links. Indeed, for $T \rightarrow \infty$ the probability Π_i does not depend any more on the energy ϵ_i and the BN model reduces to the Barabási-Albert (BA) model, based only on preferential attachment.

On the other hand, in the limit $T \rightarrow 0$ only the lowest energy node has non-zero probability to acquire new links. In Ref. [21], it has been shown that the connectivity distribution in this network model can be mapped into the occupation numbers of a Bose gas. Accordingly, one would expect a corresponding phase transition for the topology of the network at some temperature value T_c . In fact, such a critical value is observed for energy distributions where $(p(\epsilon) \rightarrow 0 \text{ for } \epsilon \rightarrow 0)$. For $T > T_c$ the system is in the "fit-get-rich" (FGR) phase, where low-energy nodes acquire links at a higher rate than high-energy ones, while for $T < T_c$ a "Bose-Einstein condensate" (BEC) or "winner-takes-all" phase emerges, where a single node grabs a finite fraction of all the links. We simulated this model assuming

$$p(\epsilon) = (\theta + 1)\epsilon^\theta \quad \text{and} \quad \epsilon \in (0, 1) \quad (11)$$

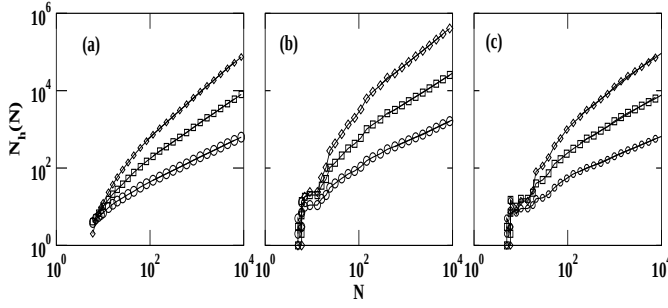


FIG. 2: Number of h -loops N_h with $h = 3, 4, 5$ in fitness model with $m = 2$ (graph(a)) and GNG model with $p = 0.5$ (graph(b)) and $p = 0.6$ (graph(c)) of size up to $N = 10^4$. The data asymptotically follow the scaling (1) with exponents that remain well below the Internet data.

where $\theta = 0.5$. Varying T , one observes a change in the behavior of N_h in the bosonic network from a scaling of the type (3), shown to be exact in the $\beta = 0$ limit for the BA network model [16], to a scaling of the type (1), valid in the low-temperature limit. In reference [16], we claim that this change occurs right at the Bose-Einstein condensation temperature T_c . A careful analysis of the transition shows in fact that the transition is rather smooth at T_c .

In order to compare networks with a similar mean degree ($\langle k \rangle = 3.5$ for the Internet), we consider the fitness model with $m = 2$ ($\langle k \rangle = 2m = 4$) and the GNG model with parameter $p = 0.5$ ($\langle k \rangle = 2/p = 4$) and $p = 0.6$ ($\langle k \rangle = 2/p = 3.33$). In the GNG network with $p = 0.5, 0.6$ one numerically finds $\gamma = 2.5(2)$ [22].

In figure 2, we show the scaling of N_h as a function of the system size for the fitness model with $m = 2$ and the GNG model with $p = 0.5, p = 0.6$. For large N , $N_h(N)$ is a power-law as in the real Internet, yet with much smaller exponents, as shown in Table I.

System	$\xi(3)$	$\xi(4)$	$\xi(5)$
AS	1.45 ± 0.07	2.07 ± 0.01	2.45 ± 0.01
Fitness	0.59 ± 0.02	0.86 ± 0.02	1.10 ± 0.02
GNG ($p=0.5$)	0.53 ± 0.03	0.72 ± 0.03	0.96 ± 0.02
GNG ($p=0.6$)	0.53 ± 0.03	0.74 ± 0.03	0.99 ± 0.02

TABLE I: The exponent $\xi(n)$ for $n = 3, 4, 5$ as defined in equation (1) for real data and network models.

When considering the bosonic network model, the picture is more complicated. The loops number behavior depends strongly on the temperature parameter.

We can distinguish a high-temperature phase, where $N_h(N)$ is better fitted by (3)- FGR phase- and a low-temperature phase, where $N_h(N)$ scales as (1) - BEC phase. Even when one decreases the temperature, $\xi(h)$ remains always far from the real network exponents, as it is shown in figure 3, so that also the bosonic network fails in reproducing correctly such feature. Furthermore, no significant sign for a 'winner' node are found in the

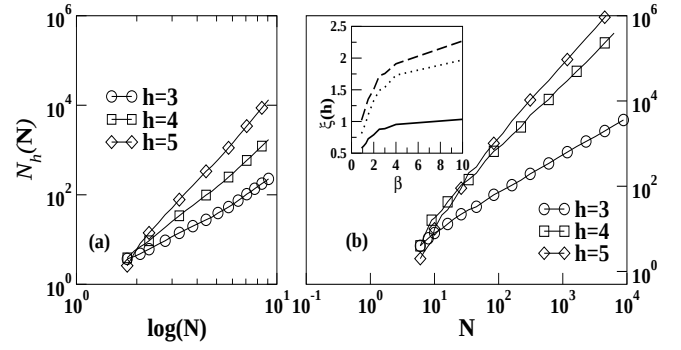


FIG. 3: The number of cycles in a bosonic network, for (a) $\beta = 0.5$ and (b) $\beta = 2.5$. In the inset of (b) we plot the exponents $\xi(h)$, for $h = 3$ (solid line), 4 (dotted line), 5 (dashed line) as a function of the inverse temperature β .

Internet data in which the most connected node has a fraction of links $k/N = 2024/9048 = 0.22$ for the January 2001 AS data.

Following [17], we also measured the clustering coefficients $c_{3,i}$ and $c_{4,i}$ as a function of the connectivity k_i of node i for all i 's. In particular, $c_{3,i}$ is the usual clustering coefficient C , i.e. the number of triangles including node i divided by the number of possible triangles $k_i(k_i - 1)/2$.

Similarly, $c_{4,i}$ measures the number of quadrilaterals passing through node i divided by the number of possible quadrilaterals Z_i . This last quantity is the sum of all possible primary quadrilaterals Z_i^p (where all vertices are nearest neighbors of node i) and all possible secondary quadrilaterals Z_i^s (where one of the vertices is a second neighbor of node i). If node i has k_i^{nn} second neighbors, $Z_i^p = k_i(k_i - 1)(k_i - 2)/2$ and $Z_i^s = k_i^{nn}k_i(k_i - 1)/2$. In Fig. 4 (a) we plot $c_3(k)$, $c_4(k)$ for the Internet data at three different times (November 1997, January 1999 and January 2001) showing that the behavior of $c_3(k)$ and $c_4(k)$ is invariant with time and scales as

$$c_h(k) \sim k^{-\delta(h)} \quad (12)$$

with $\delta(3) = 0.7(1)$ and $\delta(4) = 1.1(1)$.

In Fig. 4, we compare the behavior of $c_3(k)$ and $c_4(k)$ in real Internet data and in the Internet models. We found a similar behavior in the three networks model and in the Internet with the $c_3(k)$ and $c_4(k)$ of the Internet models scaling as (12). Exponents, however, vary significantly, as shown in Table II.

The fitness model reproduces the best the Internet clustering scaling pattern. Nevertheless, we observe that the number of triangles and quadrilaterals in real data is much larger than in the fitness network. Indeed, we have $c_3(10^3) \sim 10^{-2}$ and $c_4(10^3) \sim 10^{-4}$ in the AS network, while in the fitness model $c_3(10^3) \sim 10^{-3}$ and $c_4(10^3) \sim 10^{-5}$.

In conclusion, we computed the number $N_h(t)$ of h -loops of size $h = 3, 4, 5$ in the Internet at the Autonomous System level and we have identified them as proper motifs of the Internet. We have then compared the actual

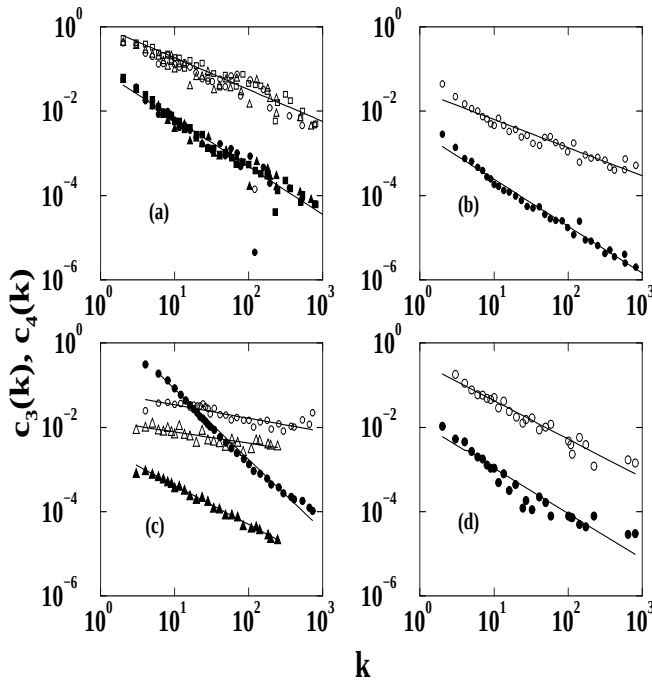


FIG. 4: The clustering coefficients $c_3(k)$ and $c_4(k)$ in Internet (graph(a)) and in the fitness model (graph(b)), the GNG model (graph(c)) with $p = 0.5$ (circles), $p = 0.6$ (triangles) and the bosonic network model with $\beta = 2.5$ (graph(d)). Empty (filled) symbols refer to $c_3(k)$ ($c_4(k)$). Graph(a) shows data as obtained in November '97 (circles), January '99 (squares) and the data taken in January '01 (triangles). Solid lines refer to power law fittings, whose exponents are reported in table (II).

data with the behavior of $N_h(N)$ in the fitness model, in the GNG model and in the Bosonic network, chosen as the most accurate Internet model developed to our best knowledge. Aside, the generalized clustering coefficients around individual nodes have been investigated as a function of nodes degrees. We have observed that, although some qualitative feature of the loop scaling and of the clustering coefficient are captured by models, the much larger number of cycles observed in the real network invoke for improvement of the theory.

The authors are grateful to Uri Alon, Shalev Itzkovitz and Yi-Cheng Zhang for useful comments and discussions. This paper has been financially supported by

System	$\delta(3)$	$\delta(4)$
AS	0.7 ± 0.1	1.1 ± 0.01
Fitness	0.67 ± 0.01	0.99 ± 0.01
GNG ($p=0.5$)	0.32 ± 0.02	1.68 ± 0.03
GNG ($p=0.6$)	0.27 ± 0.02	0.93 ± 0.01
Bosonic ($\beta = 2.5$)	0.91 ± 0.04	1.07 ± 0.07

TABLE II: The exponent of the clustering coefficient $c_3(k)$ and $c_4(k)$ as measured from Internet data and from simulations of network models.

the Swiss National Foundation, under grant no. 2051-067733.02/1, and by the European Commission - FET Open project COSIN IST-2001-33555.

-
- [1] M. Faloutsos, P. Faloutsos and C. Faloutsos *ACM SIGCOMM '99 Comput. Commun. Rev.* **29**, 251 (1999).
 - [2] G. Caldarelli, R. Marchetti, L. Pietronero, *Europhys. Lett.* **52**, 386 (2000).
 - [3] R. Albert and A.-L. Barabási, *Rev. Mod. Phys.* **74**, 47 (2002).
 - [4] S. Strogatz, *Nature* **410**, 268 (2001).
 - [5] S. N. Dorogovtsev and J. F. F. Mendes, *Adv. in Phys.* **51**, 1079 (2002).
 - [6] L.A.N. Amaral, A. Scala, M. Barthélemy and H.E. Stanley, *Proc. Nat. Acad. Sci.* **97**, 11149 (2000).
 - [7] R. Pastor-Satorras, A. Vázquez and A. Vespignani, *Phys. Rev. Lett.* **87**, 2587011 (2001).
 - [8] A. Vázquez, R. Pastor-Satorras and A. Vespignani, *Phys. Rev. E* **65**, 066130 (2002).
 - [9] P.L. Krapivsky and S. Redner, *Phys. Rev. E* **63**, 066123 (2001).
 - [10] A. Vázquez, R. Pastor-Satorras and A. Vespignani, cond-mat/0206084 (2002).
 - [11] M. E. J. Newman, *Phys. Rev. Lett.* **89**, 208701 (2002).
 - [12] S. Maslov, K. Sneppen and A. Zaliznyak, cond-mat/0205379 (2002).
 - [13] K. A. Eriksen, I. Simonsen, S. Maslov and K. Sneppen, *Phys. Rev. Lett.* **90**, 148701 (2003).
 - [14] S. Itzkovitz, R. Milo, N. Kashtan, G. Ziv and U. Alon, *Phys. Rev. E* **68**, 026127. (2003).
 - [15] R. Milo, S. Shen-Orr, S. Itzkovitz, N. Kashtan, D. Chklovskii and U. Alon, *Science* **298**, 824 (2002).
 - [16] G. Bianconi and A. Capocci, *Phys. Rev. Lett.* **90**, 078701 (2003).
 - [17] G. Caldarelli, R. Pastor-Satorras and A. Vespignani, cond-mat/0212026 (2002).
 - [18] A.-L. Barabási and R. Albert, *Science* **286**, 509 (1999).
 - [19] G. Bianconi and A.-L. Barabási, *Europhys. Lett.* **54**, 436 (2001).
 - [20] G. Caldarelli, A. Capocci, P. De Los Rios, M.A. Muñoz, *Phys. Rev. Lett.* **89**, 258702 (2002).
 - [21] G. Bianconi and A.-L. Barabási, *Phys. Rev. Lett.* **86**, 5632 (2001).
 - [22] G. Caldarelli, P. De Los Rios and L. Pietronero, cond-mat/0307610 (2003).